

NOTE REFERENCE

- | | |
|--|---|
| (A) STANDARD RING & COVER
TYPE "G" CASTING | (E) CONCRETE BASE-POURED IN
PLACE OR PRECAST |
| (B) INTAKE CASTING - SEE PLANS | (F) UNDISTURBED SOIL |
| (C) SEE FIGURE 6030.16 FOR
BOXOUT DETAIL | (G) PIPE DIAMETER AS SHOWN ON
PLANS |
| (D) ADJUSTING RING
6" THICK X 6" WIDE
5'-6" X 4'-0" EXTERIOR
DIMENSIONS | (H) CONCRETE SHAPED INVERT |




FOR ADDITIONAL DETAILS SEE SHEET 2.

REV.	DATE	BY
I	01/25/01	
DATE:	01-01-98	

SPECIAL TYPE "M-C" INTAKE COMBINATION

FIGURE: 6030.4

SHEET 1 OF 2

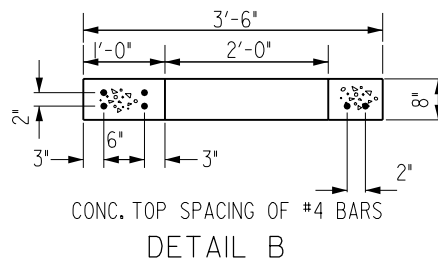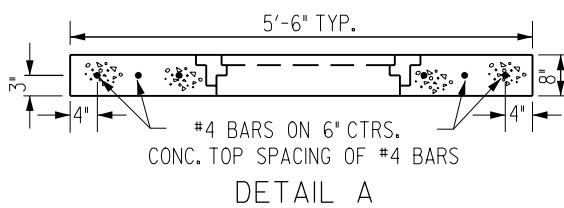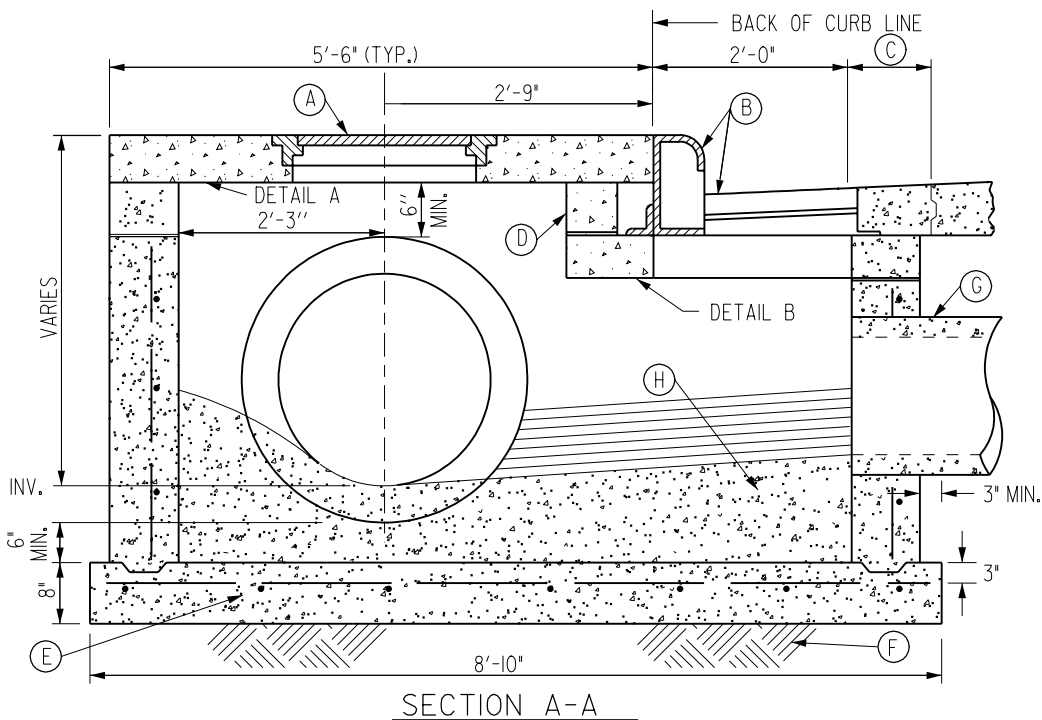

REINFORCING BARS:

1. ALL BARS #4
2. WALLS 12" EACH WAY
3. TOP-SEE DETAILS
4. DIAG. BARS AT ALL
CIRCULAR OPENINGS
5. BOTTOM-12" EACH WAY

I	01/25/01		SPECIAL TYPE "M-C" INTAKE COMBINATION	FIGURE: 6030.4
REV.	DATE	BY		
DATE: 01-01-98				SHEET 2 OF 2